

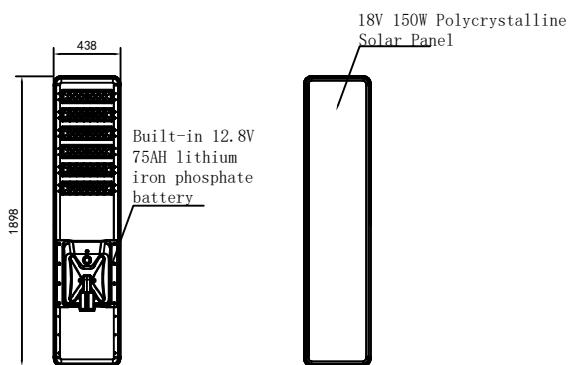


12000

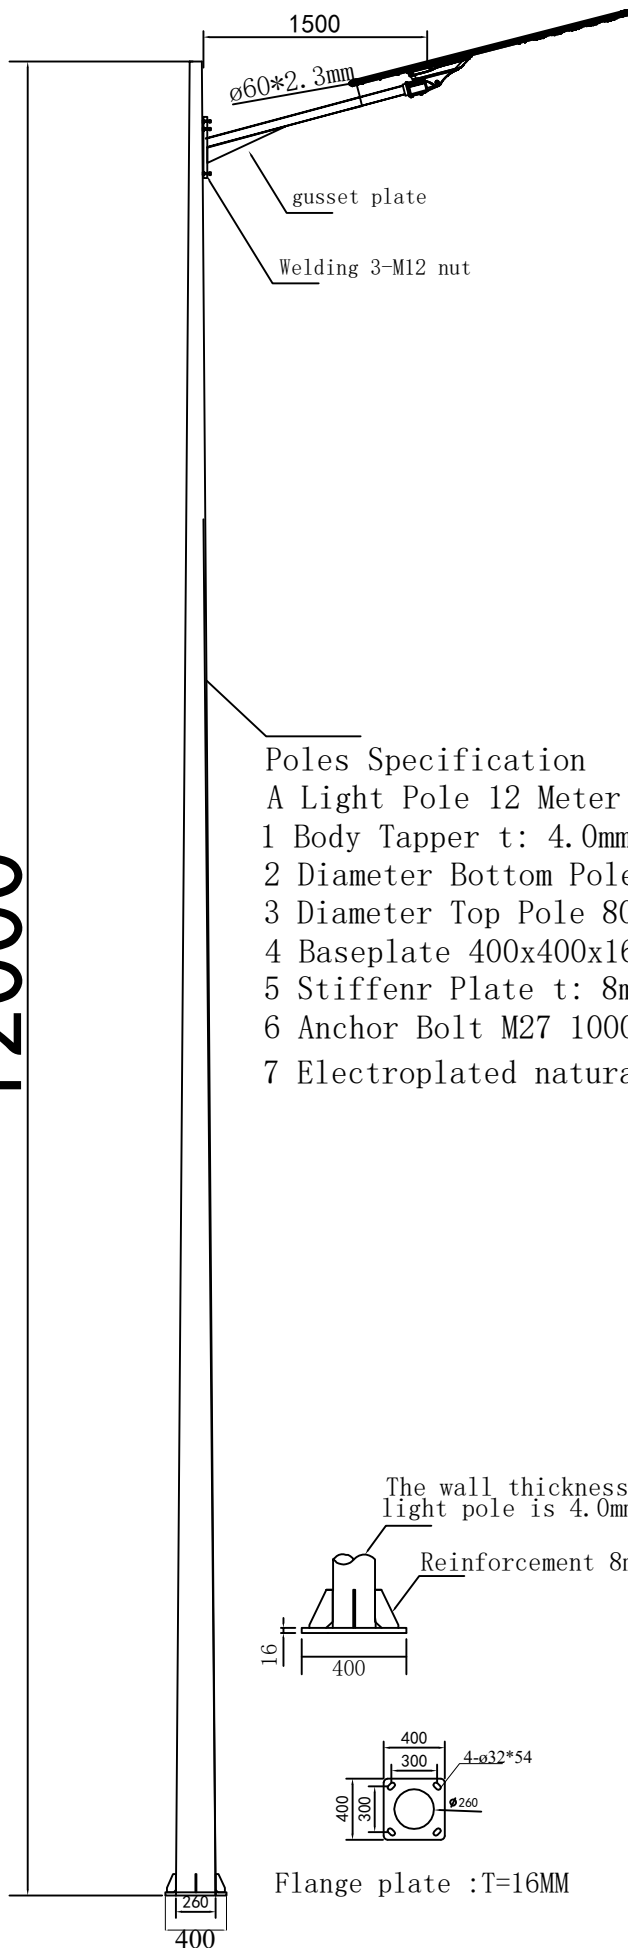


Integrated detailed drawing

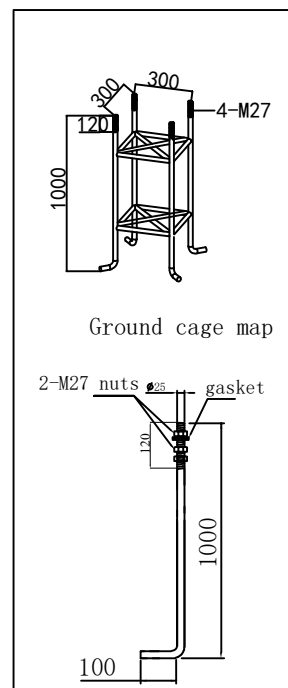


Ground cage map

	Jingcheng outdoor lighting co., ltd			Brand name	12-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order	
	High degree	12meters	sell		date of order	
	count		approval		delivery date	

12000

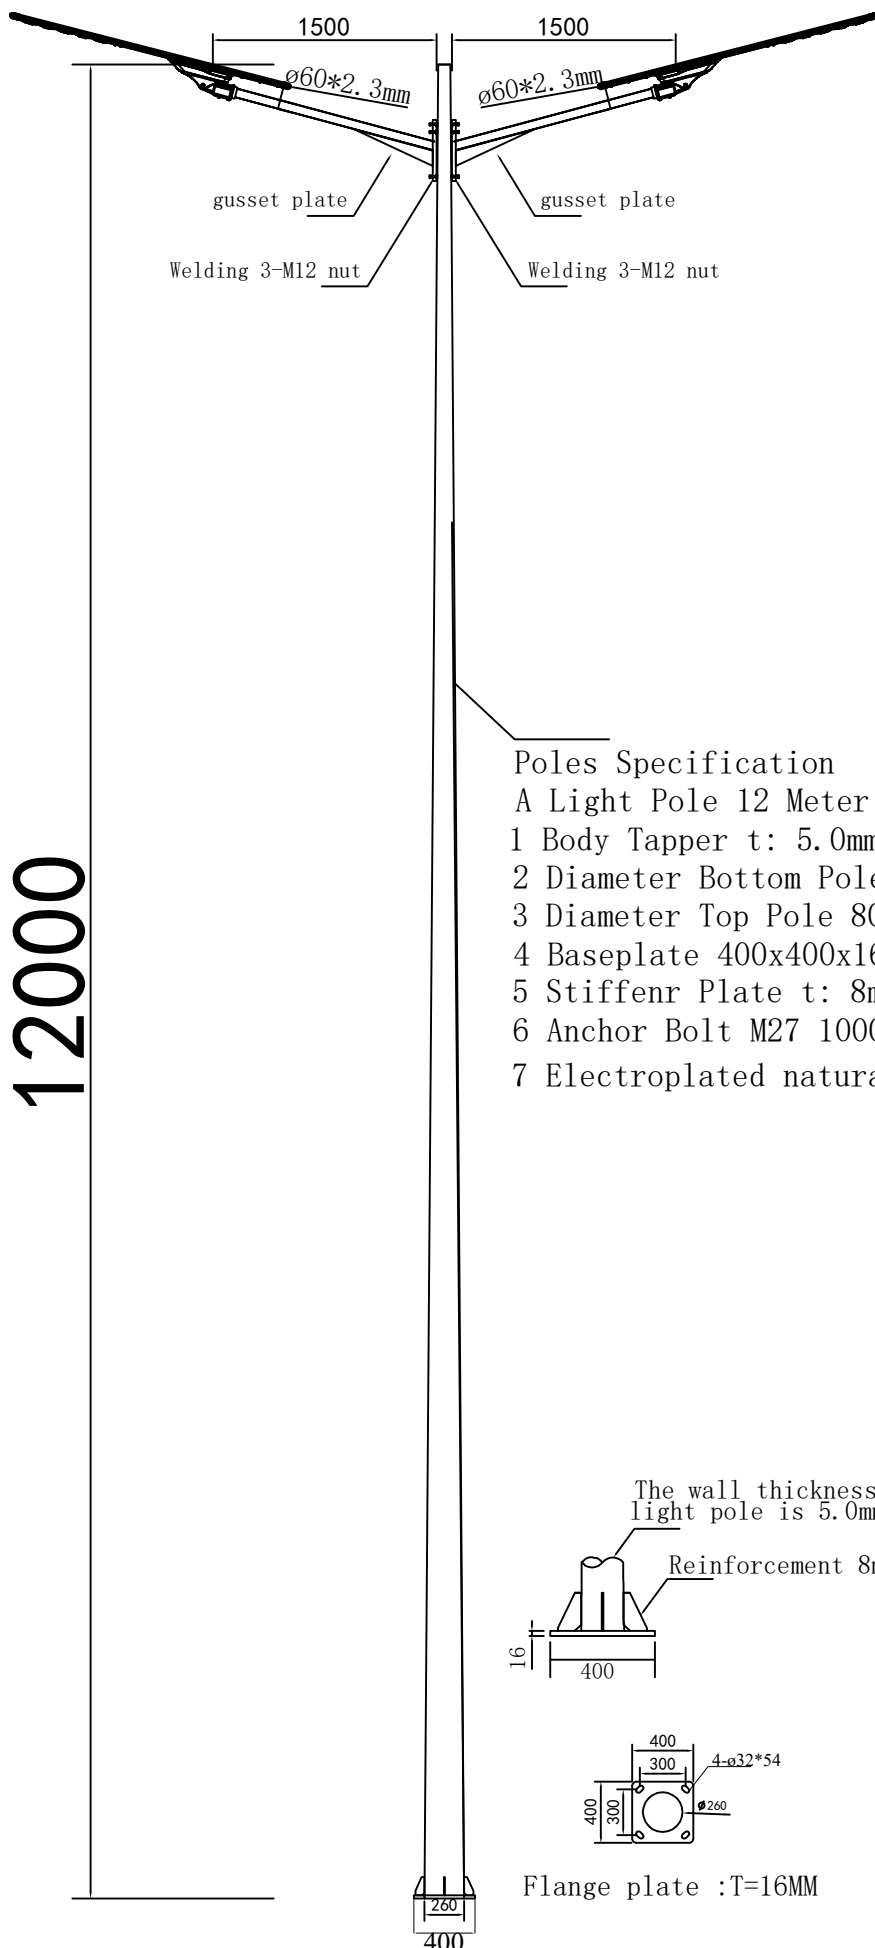



Angle of elevation

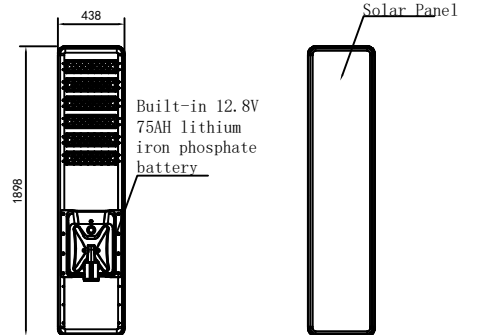


Integrated detailed drawing

Poles Specification

- 1 Light Pole 12 Meter
- 2 Diameter Bottom Pole 260mm
- 3 Diameter Top Pole 80mm
- 4 Baseplate 400x400x16mm
- 5 Stiffenr Plate t: 8mm
- 6 Anchor Bolt M27 1000X120
- 7 Electroplated natural color

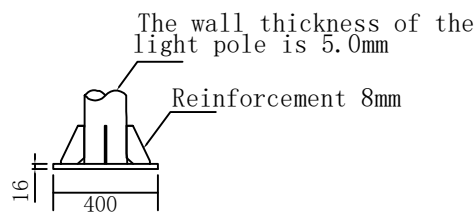



Flange plate :T=16MM

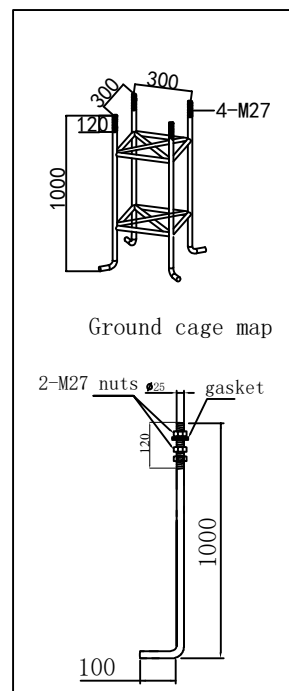

Ground cage map

	Jingcheng outdoor lighting co., ltd				Brand name	12-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	12meters	sell		date of order		
	count		approval		delivery date		

Angle of elevation

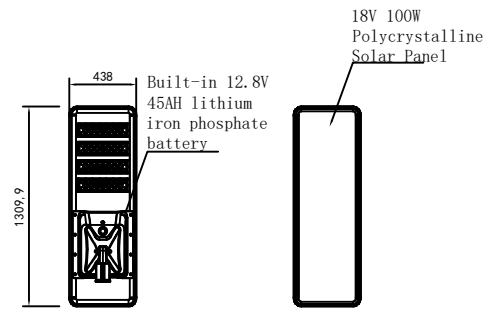
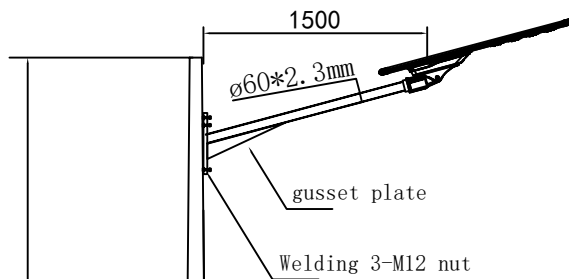


Integrated detailed drawing


Poles Specification

- A Light Pole 10 Meter
- 1 Body Tapper t: 4.0mm
- 2 Diameter Bottom Pole 240mm
- 3 Diameter Top Pole 80mm
- 4 Baseplate 400x400x16mm
- 5 Stiffenr Plate t: 8mm
- 6 Anchor Bolt M27 1000X120
- 7 Electroplated natural color

10000

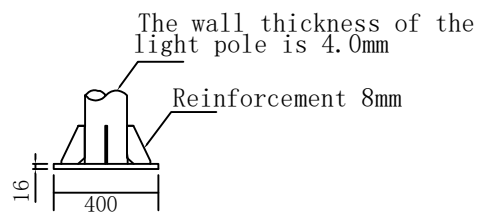

Flange plate :T=16MM


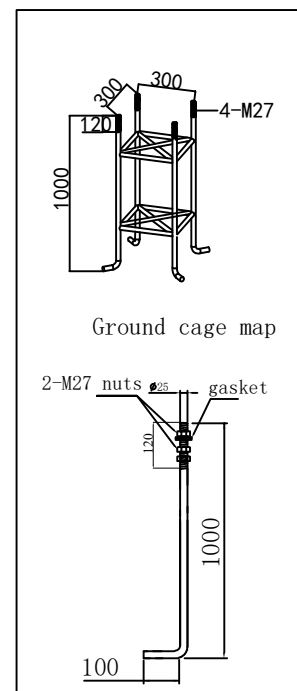


Ground cage map

	Jingcheng outdoor lighting co., ltd			Brand name	10-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order	
	High degree	10meters	sell		date of order	
	count		approval		delivery date	

10000



Angle of elevation

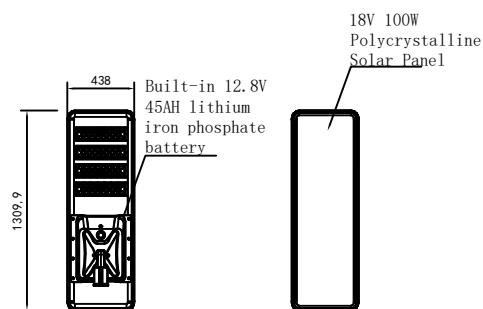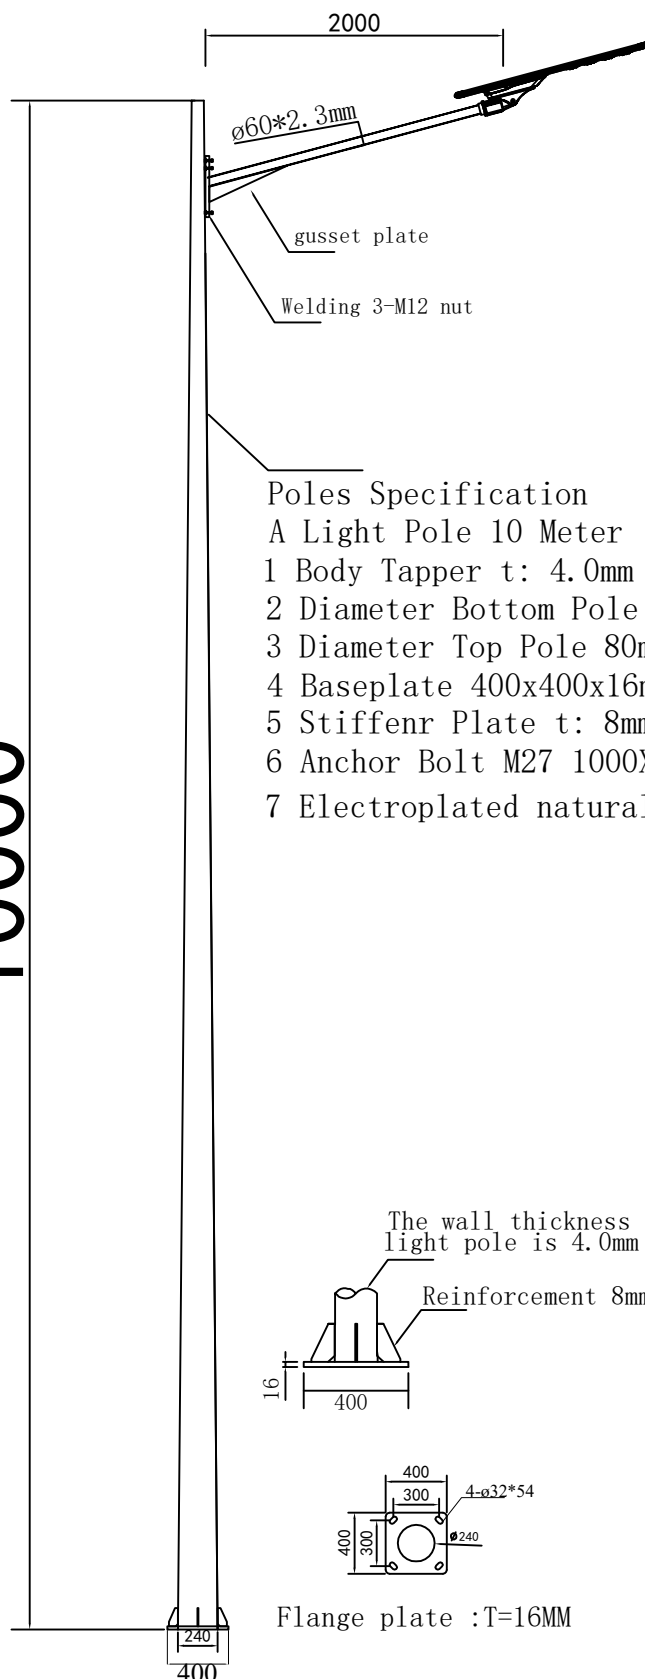


Integrated detailed drawing

Poles Specification

- A Light Pole 10 Meter
- 1 Body Tapper t: 4.0mm
- 2 Diameter Bottom Pole 240mm
- 3 Diameter Top Pole 80mm
- 4 Baseplate 400x400x16mm
- 5 Stiffenr Plate t: 8mm
- 6 Anchor Bolt M27 1000X120
- 7 Electroplated natural color

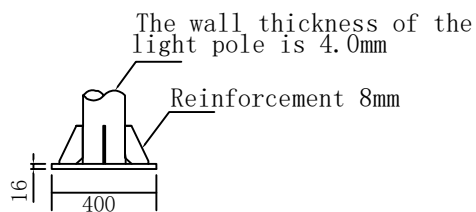


Flange plate :T=16MM

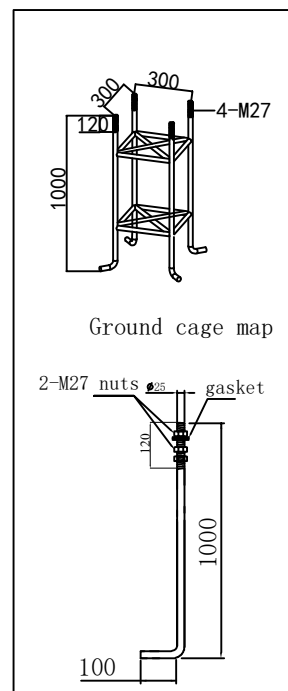


Ground cage map

	Jingcheng outdoor lighting co., ltd			Brand name	10-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order	
	High degree	10meters	sell		date of order	
	count		approval		delivery date	

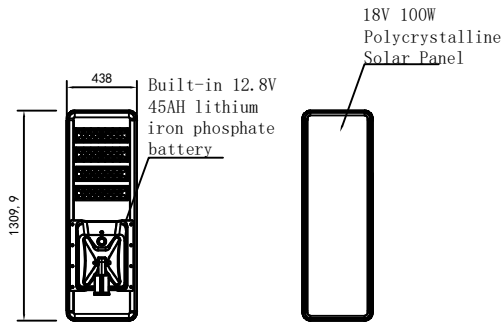


Integrated detailed drawing


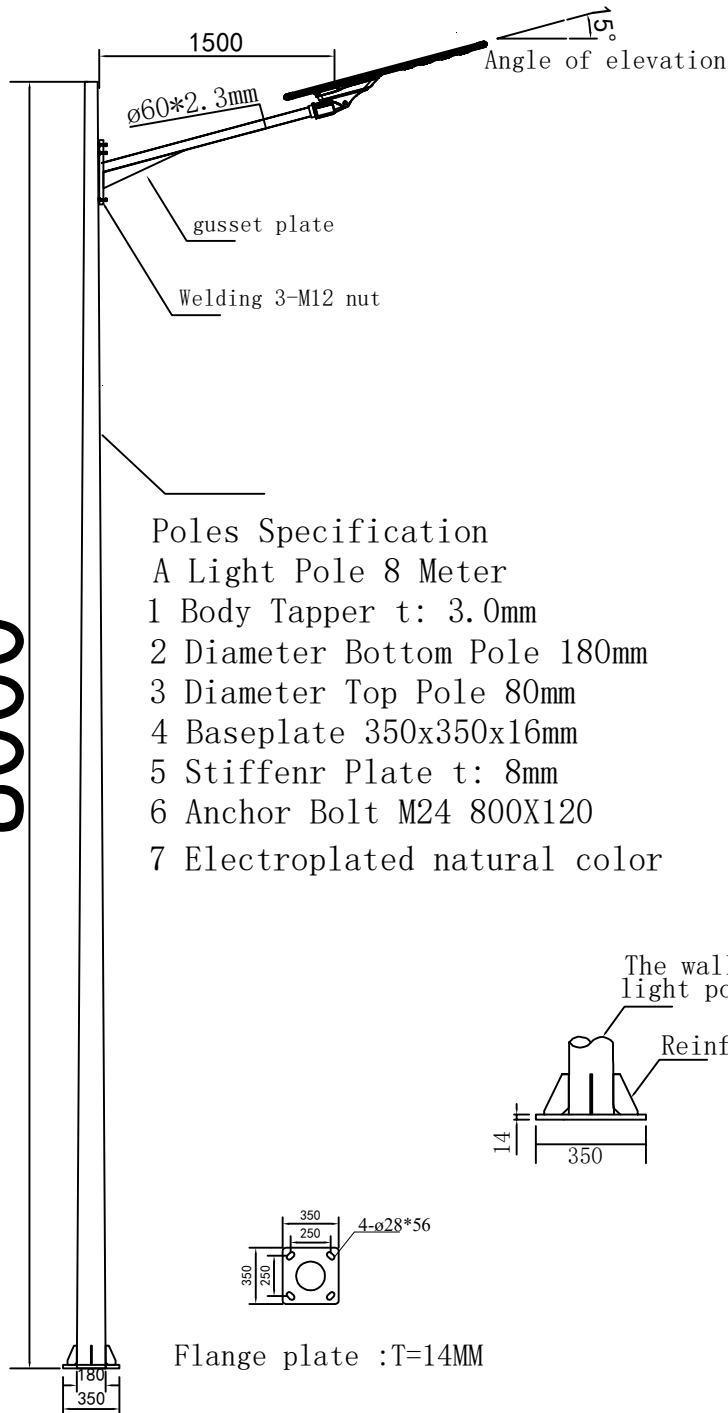


Poles Specification

- A Light Pole 8 Meter
- 1 Body Tapper t: 3.0mm
- 2 Diameter Bottom Pole 180mm
- 3 Diameter Top Pole 80mm
- 4 Baseplate 350x350x16mm
- 5 Stiffenr Plate t: 8mm
- 6 Anchor Bolt M24 800X120
- 7 Electroplated natural color

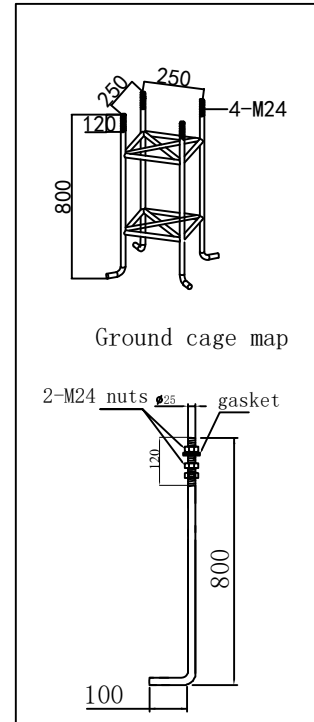


Ground cage map

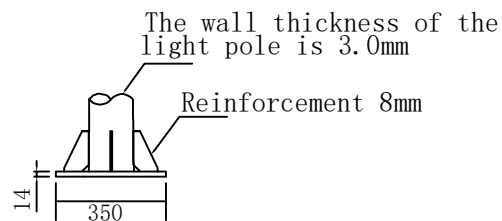


Flange plate : T=14MM

	Jingcheng outdoor lighting co., ltd				Brand name	8-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	8meters	sell		date of order		
	count		approval		delivery date		

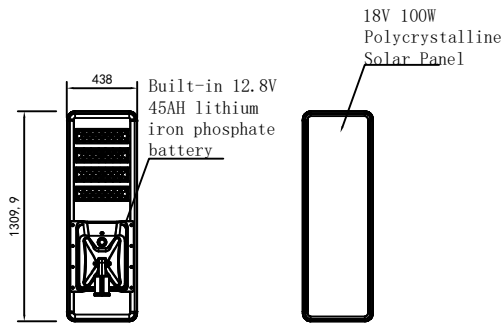


Integrated detailed drawing



Angle of elevation

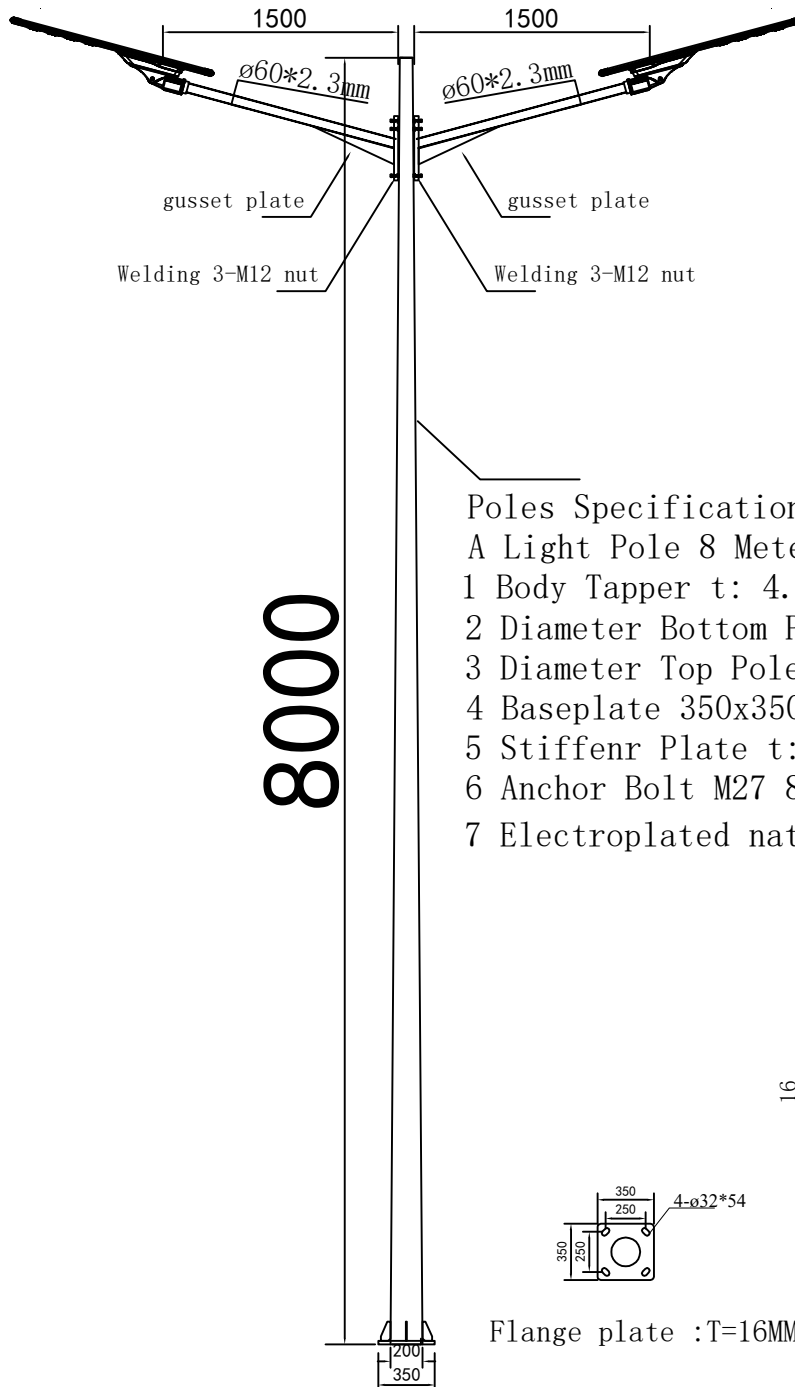

- Poles Specification
- A Light Pole 8 Meter
 - 1 Body Tapper t: 4.0mm
 - 2 Diameter Bottom Pole 200mm
 - 3 Diameter Top Pole 80mm
 - 4 Baseplate 350x350x16mm
 - 5 Stiffenr Plate t: 8mm
 - 6 Anchor Bolt M27 800X120
 - 7 Electroplated natural color

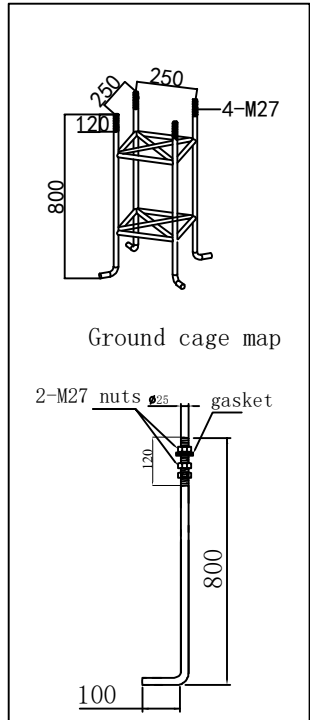


Ground cage map


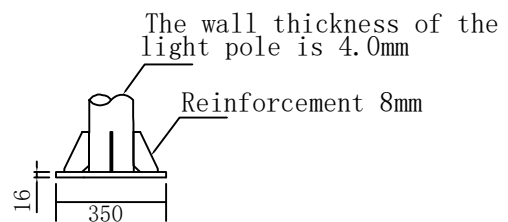


Flange plate :T=16MM

	Jingcheng outdoor lighting co., ltd				Brand name	8-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	8meters	sell		date of order		
	count		approval		delivery date		

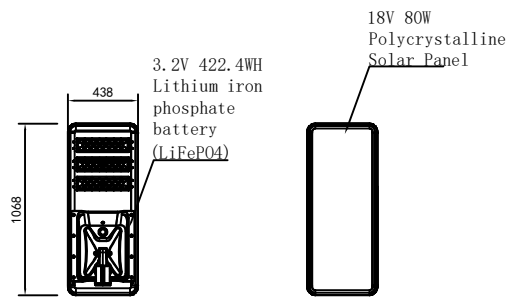

Integrated detailed drawing

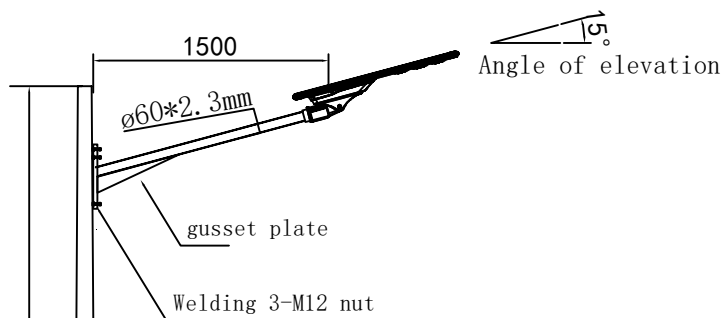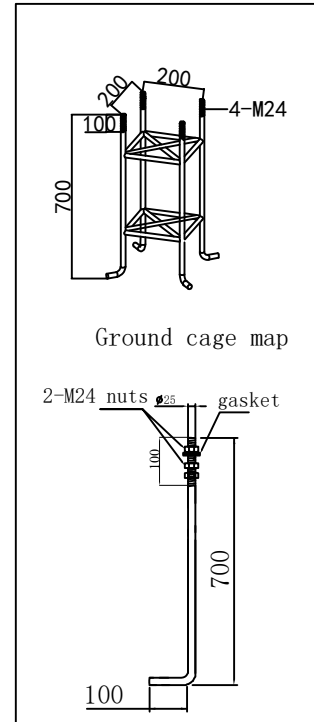

Poles Specification

A Light Pole 7 Meter

1 Body Tapper t: 3.0mm

2 Diameter Bottom Pole 180mm

3 Diameter Top Pole 70mm

4 Baseplate 280x280x14mm

5 Stiffenr Plate t: 6mm


6 Anchor Bolt M24 700X100

7 Electroplated natural color


7000

The wall thickness of the
light pole is 3.0mm


Reinforcement 6mm





Flange plate :T=14MM



	Jingcheng outdoor lighting co., ltd				Brand name	7-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	7meters	sell		date of order		
	count		approval		delivery date		

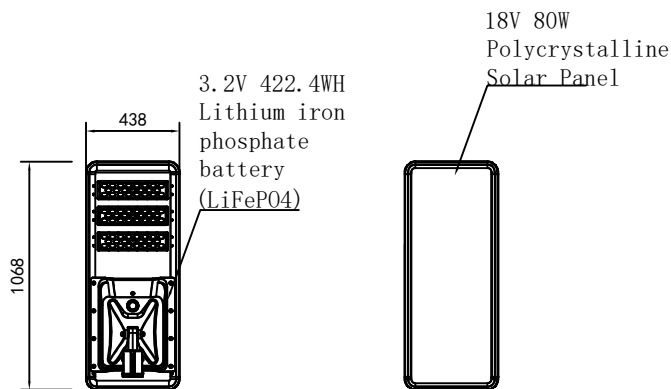

Integrated detailed drawing

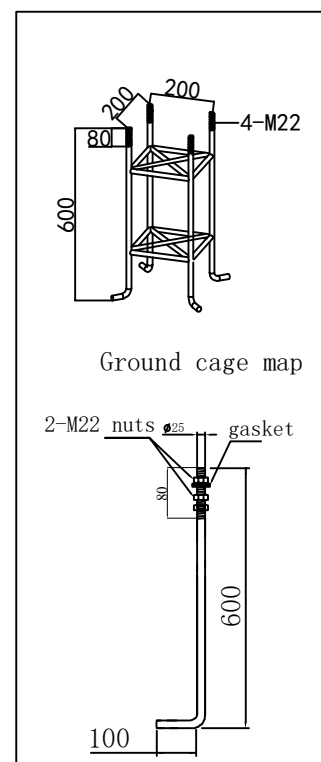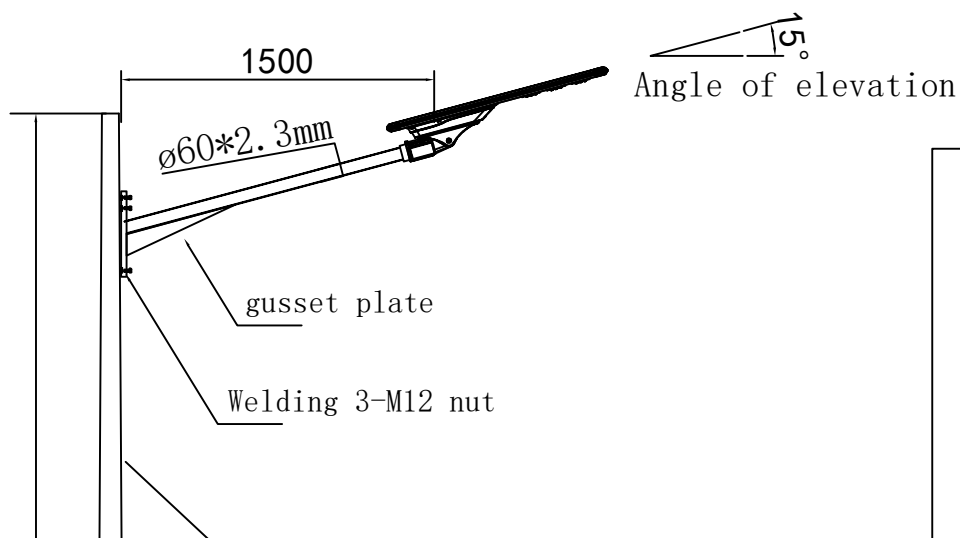

Poles Specification

A Light Pole 6 Meter

1 Body Tapper t: 3.0mm

2 Diameter Bottom Pole 150mm

3 Diameter Top Pole 70mm


4 Baseplate 280x280x14mm

5 Stiffenr Plate t: 6mm


6 Anchor Bolt M22 600X80

7 Electroplated natural color

The wall thickness of the light pole is 3.0mm

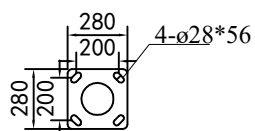


Flange plate :T=12MM


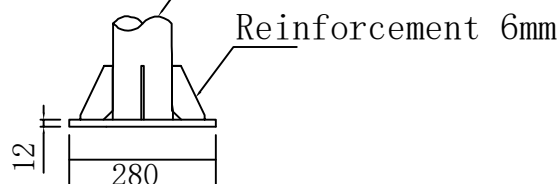


6000

	Jingcheng outdoor lighting co., ltd				Brand name	6-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	6meters	sell		date of order		
	count		approval		delivery date		

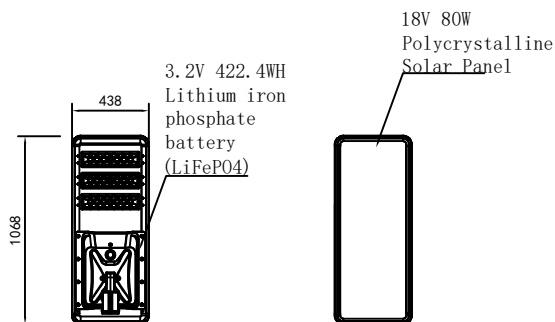


Integrated detailed drawing

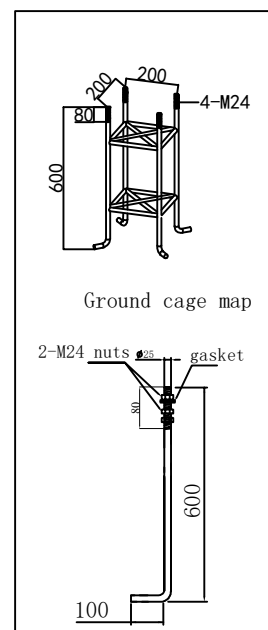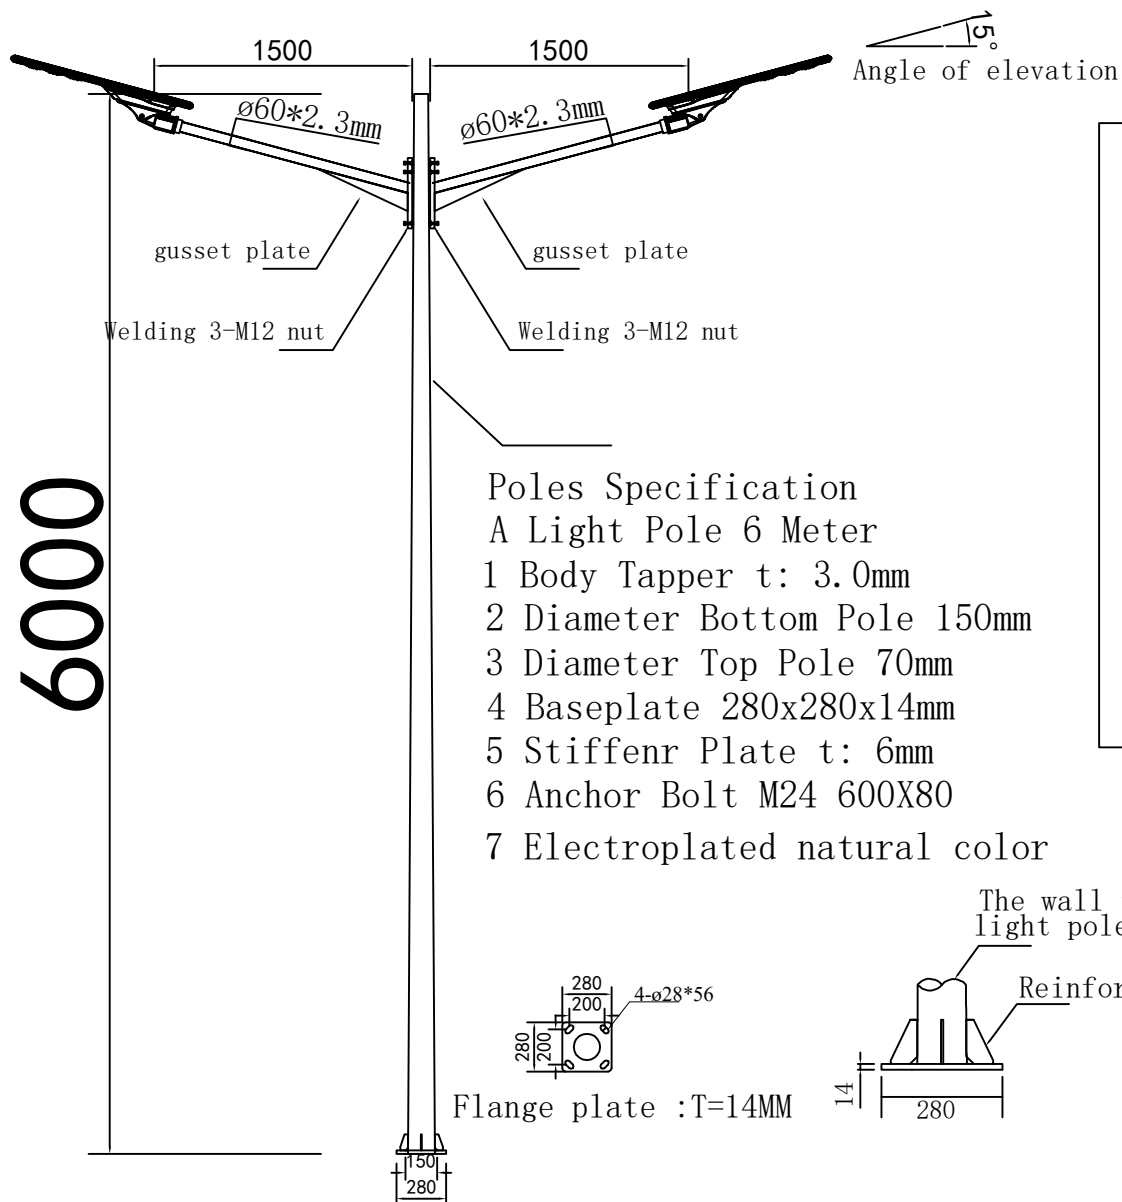



	Jingcheng outdoor lighting co., ltd				Brand name	6-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	6meters	sell		date of order		
	count		approval		delivery date		

3.2V240WH
Lithium iron
phosphate
battery
(LiFeP04)

18V 60W
Polycrystalline
Solar Panel



Integrated detailed drawing

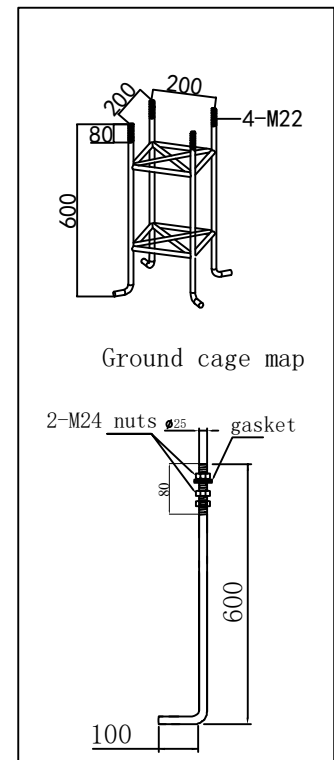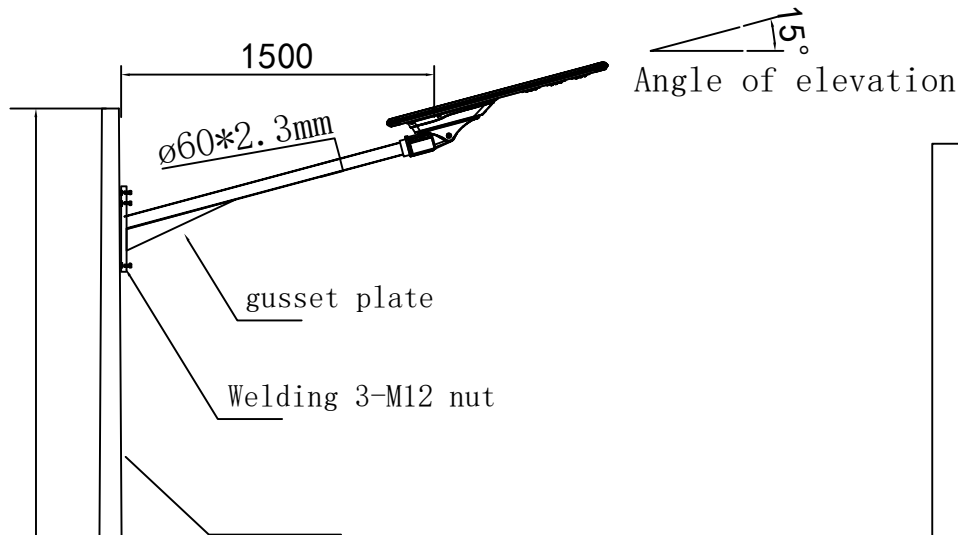

Poles Specification

A Light Pole 6 Meter

1 Body Tapper t: 3.0mm

2 Diameter Bottom Pole 150mm

3 Diameter Top Pole 70mm


4 Baseplate 280x280x14mm

5 Stiffenr Plate t: 6mm


6 Anchor Bolt M22 600X80

7 Electroplated natural color

The wall thickness of the
light pole is 3.0mm

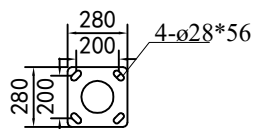

Flange plate :T=12MM

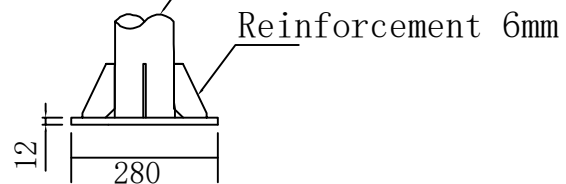

6000

	Jingcheng outdoor lighting co., ltd				Brand name	6-meter integration	Customer confirmation signature
	Single position	mm	drawing	Wu	production order		
	High degree	6meters	sell		date of order		
	count		approval		delivery date		